


Quectel BC66-NA

Compact LTE Cat NB2 Module with Ultra-low Power Consumption

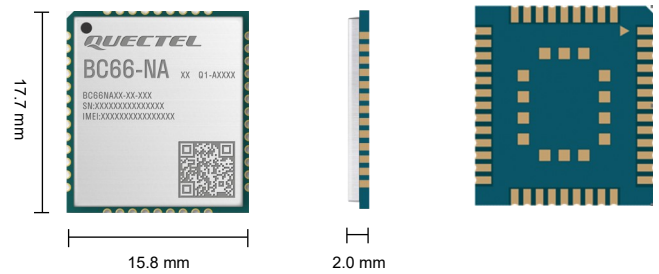

BC66-NA is a high-performance, multi-band LTE Cat NB2 module with extremely low power consumption. The ultra-compact 17.7 mm × 15.8 mm × 2.0 mm profile makes it a perfect choice for size sensitive applications. Designed to be compatible with Quectel GSM/GPRS module M66 in the compact and unified form factor, it provides a flexible and scalable platform for migrating from GSM/GPRS to NB-IoT network. Also it is pin-to-pin compatible with Quectel LTE Cat NB1 module BC66/BC65 and LTE Cat NB2 module BC68, and additionally supports band 71 and band 85 to accommodate more operators. BC66-NA provides abundant external interfaces and protocol stacks, providing great convenience for your applications.

The surface-mount technology makes BC66-NA an ideal solution for durable and rugged designs. The low profile and small size of LCC package allow it to be easily embedded into space-constrained applications and provide reliable connectivity with applications.

Due to the compact form factor, ultra-low power consumption and extended temperature range, BC66-NA is a best choice for a wide range of IoT applications, such as smart metering, bike sharing, smart wearables, smart parking, smart city, security and asset tracking, home appliances, agricultural and environmental monitoring, etc. It is able to provide a complete range of SMS and data transmission services to meet client-side demands.



Key Features

- ✓ Compact LPWA module with ultra-low power consumption
- ✓ Low power supply voltage: 2.1–3.63 V
- ✓ QuecOpen® solution which provides the optimal application design
- ✓ Build-in eSIM reserved
- ✓ Multi-band and rich external interfaces
- ✓ Compatible with Quectel GSM/GPRS module, easy for future upgrading
- ✓ Embedded with abundant Internet service protocols



Compact Size



Multi-Band NB-IoT



Extended Temperature Range: -40 °C to +85 °C



LCC Package



Multiple Serial Ports



Ultra-low Power Consumption



Quectel Enhanced AT Commands



Embedded Internet Services Protocols

Quectel BC66-NA

Compact LTE Cat NB2 Module with Ultra-low Power Consumption

Frequency Bands

B1/B2/B3/B4/B5/B8/B12/B13/B17/B18/B19/
B20/B25/B26*/B28/B66/B71/B85

Data Rate

Cat NB2:

Max. 103 kbps (DL)/151 kbps (UL)

SMS*

Text/PDU Mode

Electrical Characteristics

Output Power:

23 dBm \pm 2 dB

Sensitivity:

-129 dBm

Power Consumption (Typ.):

3.5 μ A @ Deep Sleep

0.13 mA @ Light Sleep (eDRX = 81.92 s)

0.25 mA @ Light Sleep (DRX = 2.56 s)

95 mA @ LTE Cat NB2, 23 dBm

Interfaces

USB \times 1

USIM \times 1

PSM_EINT \times 1

UART \times 3

ADC \times 1

RESET \times 1

PWRKEY \times 1

NETLIGHT \times 1

Antenna \times 1

SPI \times 1 (QuecOpen[®] Version Only)

I2C \times 1 (QuecOpen[®] Version Only)

I2S \times 1 (QuecOpen[®] Version Only)

GPIO: Configurable (QuecOpen[®] Version Only)

Software Features

Protocol Stacks:

UDP/TCP/LwM2M/MQTT/SNTP/DTLS/TLS/PPP*/

HTTP*/HTTPS*/CoAP*

Firmware Download Methods:

UART

DFOTA

USB

Enhanced Features

ECID*:

Enhanced Cell ID

OTDOA*:

Observed Time Difference of Arrival

eSIM:

Build-in eSIM reserved

General Features

58-Pin LCC Package

Supply Voltage Range:

2.1–3.63 V, 3.3 V Typ.

(GPIO Voltage Domain: 1.8 V)

Temperature Range:

Operation Temperature Range: -35 °C to +75 °C

Extended Temperature Range: -40 °C to +85 °C

Dimensions:

17.7 mm \times 15.8 mm \times 2.0 mm

Weight: 1.2 \pm 0.2 g

AT Command:

3GPP Rel-14 Compliant AT Commands

Quectel Enhanced AT Commands

Approvals

Carrier:

Vodafone/Deutsche Telekom (Europe)

T-Mobile/Verizon/AT&T* (America)

SoftBank* (Japan)

Telstra* (Australia)

Regulatory:

GCF (Global)

CE (Europe)

PTCRB (North America)

FCC (America)

IC (Canada)

KC (South Korea)

NCC* (Taiwan, China)

JATE/TELEC (Japan)

RCM (Australia/New Zealand)

NBTC* (Thailand)

IMDA* (Singapore)

Others:

RoHS

ATEX* (Europe)

* Under Development/Planning