


# Quectel BG600L-M3

## LTE Cat M1/Cat NB2/EGPRS Module

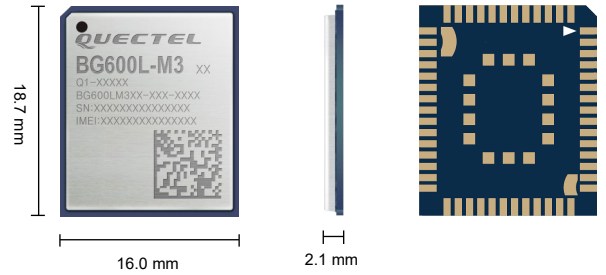

BG600L-M3 is a multi-mode LPWA module supporting LTE Cat M1/Cat NB2/EGPRS and integrated GNSS. It is 3GPP Rel. 14 compliant and offers maximum data rates of 588 kbps downlink and 1119 kbps uplink under LTE Cat M1. It features ultra-low power consumption by leveraging the integrated RAM/flash as well as the ARM Cortex A7 processor supporting ThreadX, achieving up to 70% reduction in PSM leakage and 85% reduction in eDRX current consumption compared to its predecessor.

BG600L-M3 boasts a comprehensive set of hardware-based security features and enables trusted applications to run directly on the Cortex A7 TrustZone engine. Additionally, BG600L-M3 is compatible with Quectel GSM/GPRS/GNSS module MC60, providing customers a convenient solution for network migration.

With a cost-effective SMT form factor of 18.7 mm × 16.0 mm × 2.1 mm and high integration level, BG600L-M3 enables integrators and developers to easily design their applications and take advantage from the module's low power consumption and mechanical intensity. Its advanced package allows fully automated manufacturing for high-volume applications. A rich set of Internet protocols, industry-standard interfaces (USB/UART/PCM/STATUS) and abundant functions (e.g. USB drivers for Windows 7/8/8.1/10, Linux and Android, etc.) extend the applicability of the module to a wide range of M2M applications such as tracking, wireless POS, smart metering and wearable devices.




### Key Features

- ✓ LTE Cat M1/Cat NB2/EGPRS module with ultra-low power consumption
- ✓ Easy migration from Quectel GSM/GPRS/GNSS module MC60
- ✓ Support VoLTE for LTE Cat M1 and CS voice for GSM
- ✓ Integrated RAM and flash in the baseband chipset
- ✓ Comprehensive set of hardware-based security features
- ✓ Fast time-to-market: reference designs, evaluation tools and timely technical support minimize design-in time and development efforts
- ✓ Compact SMT form factor ideal for size-constrained applications with tight space
- ✓ Robust mounting and interfaces



LTE Cat M1/  
Cat NB2



EGPRS



LGA Package



Embedded Abundant  
Protocols



DFOTA



USB 2.0 Interface



Ultra-low Power  
Consumption



Quectel Enhanced  
AT Commands



Integrated RAM/  
Flash in Chipset

# Quectel BG600L-M3

## LTE Cat M1/Cat NB2/EGPRS Module

### Variant for the Global

#### BG600L-M3

##### Cat M1:

LTE-FDD: B1/ 2/ 3/ 4/ 5/ 8/ 12/ 13/ 18/ 19/ 20/  
25/ 26/ 27/ 28/ 66/ 85

##### Cat NB2:

LTE-FDD: B1/ 2/ 3/ 4/ 5/ 8/ 12/ 13/ 18/ 19/ 20/  
25/ 28/ 66/ 71/ 85

##### EGPRS:

850/900/1800/1900 MHz

### Data

##### Cat M1:

Max. 588 kbps (DL)/ 1119 kbps (UL)

##### Cat NB2:

Max. 127 kbps (DL)/ 158.5 kbps (UL)

##### Cat NB1:

Max. 32 kbps (DL)/ 70 kbps (UL)

##### EDGE:

Max. 296 kbps (DL)/ 236.8 kbps (UL)

##### GPRS:

Max. 107 kbps (DL)/ 85.6 kbps (UL)

### Voice

VoLTE for LTE Cat M1

CS Voice for GSM

### SMS

Point-to-point MO and MT

SMS Cell Broadcast

Text and PDU Mode

### Interfaces

(U)SIM × 1 (1.8 V only)

USB 2.0 × 1

UART × 3

ADC × 1

PWRKEY × 1

RESET\_N × 1

PCM × 1 (For VoLTE Only)

I2C × 1 (For VoLTE Only)

GPIO × 6

GRFC × 2

NET\_STATUS × 1 (Network Status Indication)

STATUS × 1 (Power ON/OFF Status Indication)

Antenna × 2 (For LTE & GNSS Antennas)

### Enhanced Features

#### GNSS:

GPS/GLONASS/BeiDou/Galileo/QZSS

#### Firmware Upgrade:

via USB interface

#### DFOTA:

Delta Firmware Upgrade Over-the-Air

#### Processor:

ARM A7 Processor

#### QuecOpen®:

Simplifies the Development of Embedded Applications

#### QuecLocator®:

Support Cell ID Positioning

### Electrical Characteristics

#### Output Power:

Max. Power: 21 dBm @ LTE Bands

#### Power Consumption @ LTE Cat M1 (Typical):

Power Saving Mode: 4.0 μA

Sleep Mode: 1.66 mA @ DRX = 1.28 s

0.66 mA @ e-I-DRX = 81.92 s

Idle Mode: 18.14 mA @ DRX = 1.28 s

17.8 mA @ e-I-DRX = 81.92 s

Active Mode: 186 mA @ 21 dBm (GNSS OFF)

#### Power Consumption @ LTE Cat NB1 (Typical):

Power Saving Mode: 4.0 μA

Sleep State: 1.47 mA @ DRX = 1.28 s

0.69 mA @ e-I-DRX = 81.92 s

Idle State: 14.33 mA @ DRX = 1.28 s

14.15 mA @ e-I-DRX = 81.92 s

Active Mode: 148 mA @ 21 dBm (GNSS OFF)

### Software Features

#### USB Serial Driver:

Windows 7/8/8.1/10/11,

Linux 2.6–5.15,

Android 4.x–12.x

#### GNSS/RIL Driver:

Android 4.x–12.x

### Protocols:

PPP/TCP/UDP/SSL/TLS/FTP(S)/HTTP(S)/NITZ/  
PING/MQTT/LwM2M/CoAP/IPv6

### General Features

LGA Package

3GPP E-UTRA Release 14

Supply Voltage: 3.3V–4.3 V, Typ. 3.8V

Operating Temperature Range: -35 °C to +75 °C

Extended Temperature Range: -40 °C to +85 °C

Dimensions: 18.7 mm × 16.0 mm × 2.1 mm

3GPP TS27.007, 3GPP TS 27.005 and Quectel

Enhanced AT Commands

### Certifications

#### Carrier:

Vodafone/Deutsche Telekom (Europe)

T-Mobile/AT&T\* (America)

#### Regulatory:

GCF (Global)

CE (Europe)

PTCRB (North America)

FCC (America)

UKCA (The UK)

IC (Canada)

Anatel (Brazil)

RCM (Australia/New Zealand)

#### Others:

RoHS

\* Under Development/Planning or Ongoing