
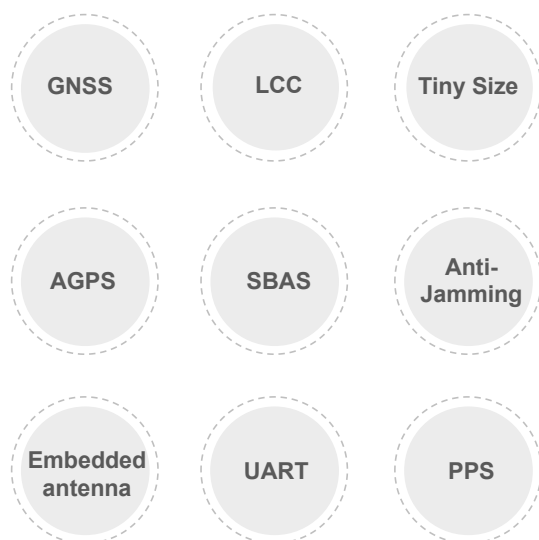


SIM32ELA

SIMCom GNSS Module

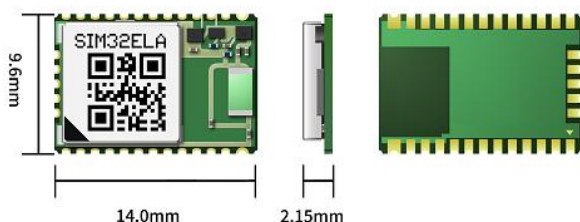

Product Description

SIM32ELA is a high performance and reliable GNSS module. It is a GNSS module integrated with GPS & GLONASS & BDS & Galileo & QZSS system in a LCC type with AIROHA's high sensitivity navigation engine, which allows customer to achieve industry's high level sensitivity, accuracy, and Time-to-First-Fix (TTFF) with lower power consumption.

SIM32ELA provides simultaneous GPS, GLONASS, BDS, Galileo and QZSS open service L1 reception capability. With 47 GNSS receiver channels, SIM32ELA can acquire and track any mix of multiple satellite signals. Combining advanced AGPS called EASY™ (Embedded Assist System) with proven AlwaysLocate™ technology, SIM32ELA achieves the highest performance and fully meets the industrial standard.

Key Benefits

- ◆ Support EASY™ self-generated orbit prediction
- ◆ Support EPO™ orbit prediction
- ◆ Support SBAS ranging (WAAS, EGNOS, GAGAN, MSAS)
- ◆ Support Jamming Removing
- ◆ Low-noise amplifier has been integrated
- ◆ Embedded antenna

Mechanical data

Dimensions	14*9.6*2.15mm
Weight	0.5g

Features

Support GPS/GLONASS/BDS/Galileo/QZSS (L1 Band Receiver 1575.42MHz)
Support EASY™ self-generated orbit prediction
Support EPO™ orbit prediction
Support SBAS ranging (WAAS, EGNOS, GAGAN, MSAS)
Support Jamming Removing
Low-noise amplifier has been integrated

Interfaces

Serial interfaces	UART
Digital I/O	Pulse-per-second (PPS) EINT0 input
Protocols	NMEA RTCM

Certifications

CE/UKCA
RoHS/REACH

Performance data

Receiver type	47channels GNSS receiver
Max. update rate	10Hz
Sensitivity ¹	
Tracking	-166dBm
Reacquisition	-158dBm
Cold starts	-148dBm
Time-To-First Fix ²	
Cold starts	30s
Warm start	25s
Hot starts	1s
EPO Assist	15s
Accuracy	
Automatic Position ³	2M
Speed ⁴	0.1m/s
Operation temperature ⁵	-40°C~+85 °C

Electrical data

Power supply	2.8V~4.3V
Backup power	2.3V~4.6V
Power consumption ^{2,6}	
Acquisition	11mA
Tracking	11mA
Sleep current	210uA
Backup	15uA

Note

1. Demonstrated in lab
2. All SV @ -130 dBm, GPS&GLONASS&BDS&Galileo mode
3. 50% 24 hr static, -130dBm,GPS&GLONASS mode
4. 50%@ 30m/s
5. When at -40°C~ -30°C,the sensitivity will be somewhat worse